

Technical Data Sheet


EZ WAX

WATER BASED ACRYLIC FLOOR WAX

EZ WAX is a water based interior acrylic floor wax. It is perfect for small areas as well as large commercial areas as it can be applied by mop or high speed burnishing. EZ WAX yields rapid gloss build along with superior long term wear characteristics. Its superior resistance to wet and dry traffic wear can yield a smooth polished look for months without maintenance.

Compliances - Specifications

Typical Properties & Technical Information	
PROPERTY	VALUE
Solids/Active Content, Percentage by weight	21% +/- 1%
Dry Time - Tack Free	1 - 2 hours
Dry Time - Foot Traffic	12 - 24 hours
Dry Time - Heavy Traffic	24 - 48 hours
Re-Coat Time Window	1 - 3 hours
Application Temperature	50° F - 80° F
VOC (Volatile Organic Compound) Content	0 grams/Liter
Appearance - Wet	Milky White
Appearance - Dry	Clear and High Gloss



Key Features

Provides superior sheen and resistance to abrasion and scuffing.

This product is non-flammable, non-combustible, non-corrosive and not hazardous.


Easy to use and has great coverage.

Contains 0 g/L VOC content making this product legal for sale to all regions of the US and Canada.

Recommended Applications

Metallic Epoxy Floors | Polyaspartic Floors | Previously Sealed or Waxed Floors

Any other interior sealed concrete surface where a glossy wax with superior maintenance properties is desired.

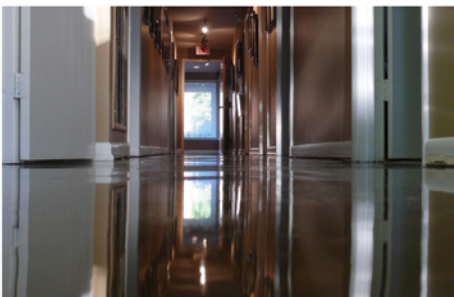

EZ WAX



Precautions and Limitations

- This product will freeze during storage. Store at temperatures above 40°F.
- All HVAC ventilation ducts should be somehow blocked prior to application so solvent fumes are not distributed.
- Do not allow this product to be subjected to any form of moisture for 18-24 hours after application.
- It is not recommended to apply product over carpet, tile, or other types of floor adhesives.
- This product performs best when applied in very light coats. Do not puddle or apply in thick coats.
- Please be aware that this product when cured may be slippery when wet.
- This product is not resistant to brake fluid, gasoline, and many similar products.
- It is not recommended to thin product. Improper thinning may cause sealer to delaminate in a short time frame.
- This product may darken the surface of many new and existing concrete slabs. Test prior to use.
- This product is harmful if swallowed. Abide by recommended safety guidelines.
- This product was designed for interior, foot traffic use only. It is not recommended for exterior use or vehicle traffic.
- This product should only be diluted for spray buffing only. Do not dilute for normal use.
- This product should only be used as a sacrificial coating and not used as a scaling compound.

Application Instructions

SURFACE PREP: Allow any coatings to fully cure for at least 3-5 days prior to applying wax. Be sure the area of the concrete to be removed is free of trash and debris. Protect all other areas. Mask off all adjacent surfaces with painter's tape or plastic duct tape. If spray buffing, use a plastic or coated cardboard as a spray shield.

MIXING: Stir well before using. Material may separate during long term storage.

COVERAGE RATE: *First Coat* : 1000 ft² per gallon* *Optional Second Coat* : 1000 ft² per gallon*

*Coverage rates may vary depending upon surface porosity, texture, application method and prior sealer application. Excessive build up should be avoided.

APPLICATION:

- Do not apply by pouring directly onto surface. Use a plastic roller pan. Apply by synthetic fiber wax applicator, lambs wool applicator, or clean sponge mop.
- Apply at a rate of 1000 square feet per gallon in very thin coats only. Apply in one direction to a consistent, even, and uniform finish. If puddling or pinholes appear, work them out into a thin coat.
- Allow to dry 1-3 hours. Repeat process as many times as necessary to achieve required finish.

If spray buffing, dilute wax 1:2 with water. Apply using a trig mist sprayer over a small area at a time. Buff that area until the liquid has disappeared and a superior shine is left. Continue this same process throughout the whole floor.

Maintenance coats may be necessary every once in a while as traffic will eventually dull the surface. Simply mop the area clean using a light detergent solution. Allow to dry and then apply a coat of wax to rejuvenate the smooth finish.

Warning: When applying wax over a newly sealed surface, allow 3-5 days with proper ventilation prior to wax application. Failure to allow this window could result in blushing of the wax.

PLEASE NOTE: It is always recommended to test the product in a small, inconspicuous area (on the same concrete substrate) for desired results prior to application. Coverage rates may vary for all coatings and substrates depending on porosity, density, texture etc. **DO NOT USE ON BRICK.**

CLEAN-UP: Use soap and warm water. Dispose of containers in accordance with local, state and federal regulations.

PRODUCT REMOVAL: Product may be re-coated up to 100 times. When product removal is necessary, use a light ammonia and water solution or commercial wax stripper to strip the waxed area back to the sealed surface.

SHELF LIFE: Up to one year from manufacture date in its original, unopened container stored at room temperature.

PACKAGING: Available in 1 gallon.

Always read all technical information, label and SDS prior to use. This information can be found online or by calling customer service at the number below.